

puzzle 2.0

Product data sheet no. 9167 - R - 05

Issue: December 2019

SPORTEC® puzzle 2.0 is made of our established floor covering **SPORTEC® color** and **SPORTEC® purcolor** and is suitable as a rugged, easy-to-clean and water-repellent floor covering material for use in fitness and gym facilities, retail outlets, exhibition halls, equipment storage rooms and ice sports stadiums. It has the same excellent properties as the both floor coverings and combines these with the variability of a mobile floor covering. Its interlocking teeth ensure a strong bond between the mats, whereby also larger areas can be installed fast and easy. **SPORTEC® puzzle 2.0** can be disconnected and laid out again on another place. A mixture of different colours is simple possible and enables a wide scope of creativity.

Material


Material:

SPORTEC® color: Fine-grained recycled tyre rubber (black) and 15% of coloured EPDM granules bonded with polyurethane elastomer.

SPORTEC® purcolor: 100% coloured EPDM granules with a share of 15% black EPDM granules bonded with polyurethane elastomer.

Product design

Colour(s):

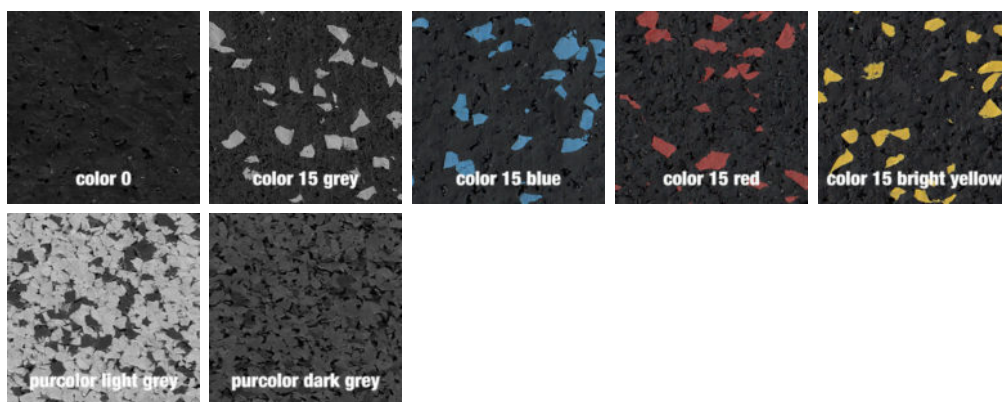

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

page 1 of 3

puzzle 2.0

Product data sheet no. 9167 - R - 05

Issue: December 2019

Surface: fine granule structure
Note: (low colour differences are conditional of material)

Dimensions / Tolerances / Weight

Thickness(es): 6, 8 and 10 mm (± 0.3 mm)
(other thicknesses on request)

Length x width: dimension puzzle: 1030 x 1030 mm (± 1.5 %)
covering dimension: 1000 x 1000 mm (± 1.5 %)

Density: approx. 1050 kg/m³ (at SPORTEC color)
approx. 1250 kg/m³ (at SPORTEC purcolor)

Area weight: at SPORTEC® color:
approx. 6,3 kg/m² (6mm); approx. 8,4 kg/m² (8mm);
approx. 10,5 kg/m² (10mm)

at SPORTEC purcolor:
approx. 7,5 kg/m² (6mm); approx. 10,0 kg/m² (8mm);
approx. 12,5 kg/m² (10mm)

Product Testing

Fire resistance: E_{fl} (DIN EN 13501-1) (at SPORTEC color)
C_{fl}-s1 (B_{fl}-s1 on request) (DIN EN 13501-1) (at SPORTEC purcolor)


Tensile strength: min. 1.5 N/mm² (EN ISO 1798) (at SPORTEC color)
min. 0.7 N/mm² (EN ISO 1798) (at SPORTEC purcolor)

Elongation at break: min. 80% (EN ISO 1798) (at SPORTEC color)
min. 70% (EN ISO 1798) (at SPORTEC purcolor)

Hardness: 60 $\pm$ 5 Shore A (DIN 53505)

Temperature range: -30°C to 80°C (internal tested)

Abrasion: max. 200 mm³ (DIN 53516) (at SPORTEC color)
max. 450 mm³ (DIN 53516) (at SPORTEC purcolor)

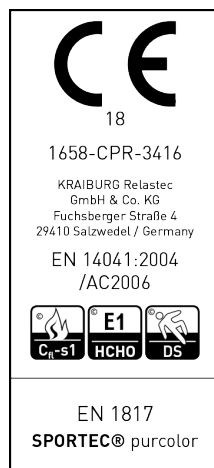

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

page 2 of 3

puzzle 2.0

Product data sheet no. 9167 - R - 05


Issue: December 2019

Coefficient of friction:	>0.30 μ (DS) (EN 13893)
Anti-slip property:	R 10 (DIN 51130) R 11 (sealed with RZ turbo protect zero + RZ grip)
Step sound insulation:	18dB (at 8mm) (DIN EN ISO 140-8:1998-03)
Remaining deformation:	0.13 mm (at 8 mm SPORTEC color) (EN 433:1994-11) 0.54 mm (at 8 mm SPORTEC purcolor) (EN 433:1994-11)
Compression set:	approx. 15 % (internal tested)
Electrostatic properties:	0.5 kV (DIN EN 1815:1995-06) (at SPORTEC color) 2.6 kV (DIN EN 1815:1995-06) (at SPORTEC purcolor)
Light fastness:	2-3 (grey scale) (DIN EN 105-B02:1999-09) (at SPORTEC color) 4 (5*) grey scale (DIN EN 105-B02:1999-09) (at SPORTEC color) (* if sealed with a suitable 2-component PU varnish)
Castor chair suitability:	for permanent use adapted (DIN EN 1307: 1997-06)
Emissions:	meets the requirements of the DIBt principles (AgBB emission test)
VOC emission rating:	



Installation

Installation has to be done in accordance to the Installation Recommendation of **SPORTEC® puzzle 2.0**.

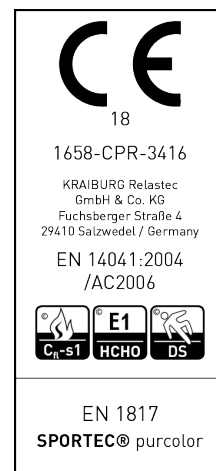

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

page 3 of 3